



1 Decide where the Showerlay is going to be positioned and make sure the area is clear and dirt free. Lay the Showerlay down into place.



2 Mark out the drain position on the floor.



3 Cut out a hole big enough to fit the Dallmer drain. This should be slightly larger than the mark made on the floor and should allow room for the Dallmer drains knuckle.



4 Position the pipework. Make sure the Dallmer drain lines up correctly and then connect the pipework to the Dallmer drain using a solvent weld.



5 Place the black rubber ring onto the top of the Dallmer drain.



6 Make sure the floor is level in all directions.



7 Using a full bed of flexible cement based tile adhesive, fix the Showerlay to the floor. Continue checking it is level in all directions.



8 Push the Showerlay down firmly to the floor and then check again to make sure all is level and there is no movement at all.



9 Screw the plastic ring through the Showerlay into the Dallmer drain making sure the black rubber ring is in position.




10 Using the tool provided, screw the plastic ring as tight as possible.



11 Place the hair trap inside.



12 Push in the white funnel.

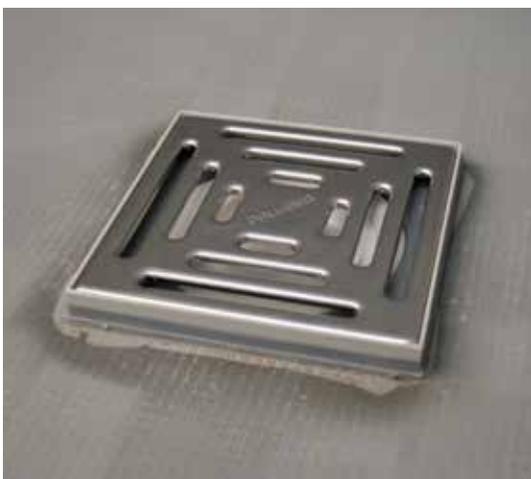


13 If necessary place the plastic height extension piece on for thicker tiles and then position the grill.



14 Using 20mm Marmox boards, cover the rest of the floor. Fix down using a good quality cement based tile adhesive or screws and washers at every 30cm.



15 Tape around the main wet areas with Marmox Self Adhesive Waterproof Tape. Now tiling can begin directly onto the Marmox.

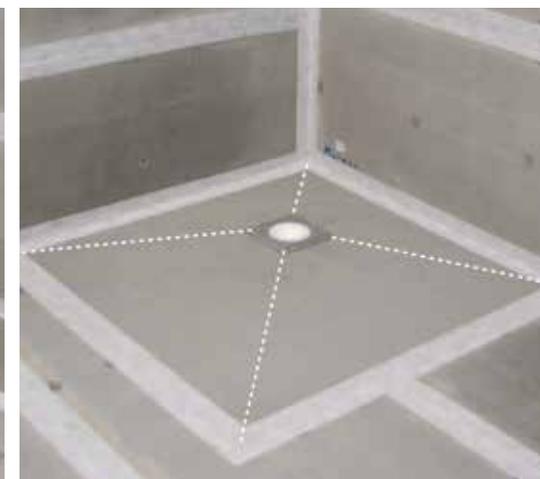

16 If using tiles larger than 10cm on the Showerlay they should be cut along the lines shown above.