


marmox showerlay³⁶⁰

Floor level shower base

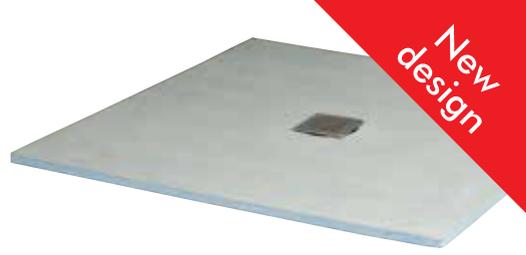

Shower areas or wetrooms

Easily create a sloping wetroom floor!

Showerlays are pre-sloped flooring panels with integral drainage used to create “level access” tiled shower areas. Complete tiled wetrooms or simple shower areas are made using the Marmox system of a Marmox Showerlay, which provides the drainage area beneath the shower head and Marmox Multiboards on the walls and surrounding floor. Showerlay and Multiboard both provide an exceptionally stable “decoupling” substrate to tile upon. They also provide thermal insulation and are completely impermeable to water guaranteeing them to be totally leak-proof.

Marmox Showerlays are available in many sizes and in two versions:

- The 40mm thick version has a stylish brushed stainless steel linear channel drain.
- The 20/24mm thick versions have a square brushed stainless steel drain in various locations.

Both types feature a compact drain just 80mm deep with a 50mm water seal. The gully can be adjusted to make the outlet pipe horizontal, vertical or any angle in between. Depending on the angle of the outlet pipe, the flow rate rate is 30 to 50 litres per minute.



- fully waterproof
- lightweight to handle
- linear or square drain
- ready for tiling
- centre or offset drainage
- can be cut down to size



What are Showerlays?

Showerlays are constructed from high density polystyrene extruded to the precise shape and dimensions required to ensure a suitable flow rate to the in-built drain. This "XPS" is coated on both sides with a skin of a unique blend of polymer concrete reinforced with patented nanotechnology.

Both the square and linear drain types feature a height adjustable drain grate so match the height of thicker tiles when necessary.

How are they used?

Showerlays are fixed onto a timber or concrete floor with tile adhesive. At the lowest point of the unit where the drain hole is located, a frame has already been fitted in the factory which is designed to connect to the adjustable drain unit.

Specifications

	size (mm)	perimeter thickness (mm)
Centre drain	800 x 800	20
	900 x 900	20
	1000 x 1000	20
	1200 x 760	20
	1200 x 900	20
	1200 x 1200	20
	1500 x 1500	24

Offset drain	1000 x 1000	20
	1300 x 800	20
	1500 x 800	24
	1200 x 760	20
	1200 x 900	20
	1200 x 1200	20
	1850 x 900	24













Grate size: 120x120mm

Showerlay Linear
size (mm)
width x depth

Offset drain	1200 x 900	40
	1850 x 900	40
	1200 x 1200	40
	900 x 900	40

Grate size: 600x70mm

1500, 1200, 1000, 900 and 800 square centre drain



Marmox (UK) Ltd Caxton House, 101-103 Hopewell Drive, Chatham, Kent. ME5 7NP
Tel: +44 (0)1634 835290 Fax: +44 (0)1634 835299 Email: sales@marmox.co.uk

www.marmox.co.uk